



BULK HEAD MOUNT HOUSINGS


WITH 2 LEVERS / 4 PEGS AND GASKET



In this case the bulk head mount housings are provided with double locking mechanisms which ensure IP 65 class protection even in the case of one lock accidentally opening up.

| Technical Details : | |
|---------------------|-------------------------------|
| Material | Die cast Alluminium alloy |
| Protection Class | IP 66 |
| Voltage | For Inserts upto 500V |
| Gasket | Vinyl Nitrile Elastomer (NBR) |

Panel Cutout

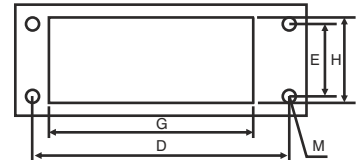

| Cat. No. For Housing with 2 Levers | Cat. No. For Housing with 4 Pegs | Enclosure Type | Enclosure Size (mm) | D (mm) | E (mm) | G (mm) | H (mm) | M (Ømm) |
|------------------------------------|----------------------------------|----------------|---------------------|--------|--------|--------|--------|---------|
| W10HB2/B10 | WR10HB2/B10 | 10B | 57 x 27 | 83 | 32 | 66.5 | 36 | 4.5 |
| W16HB2/B16 | WR16HB2/B16 | 16B | 77 x 27 | 103 | 32 | 86.5 | 36 | 4.5 |
| W24HB2/B24 | WR24HB2/B24 | 24B | 104 x 27 | 130 | 32 | 113 | 36 | 4.5 |
| W32HB2/A32 | - | 32A | 66 x 40 | 92 | 42 | 75 | 58.6 | 4.5 |
| W32HB2/B32 | WR32HB2/B32 | 32B | 77 x 62 | 110 | 65 | 87.5 | 76.5 | 5.5 |