



BULK HEAD MOUNT HOUSINGS


WITH 2 LEVERS / 4 PEGS AND GASKET



In this case the bulk head mount housings are provided with double locking mechanisms which ensure IP 65 class protection even in the case of one lock accidentally opening up.

Technical Details :	
Material	Die cast Alluminium alloy
Protection Class	IP 66
Voltage	For Inserts upto 500V
Gasket	Vinyl Nitrile Elastomer (NBR)

Panel Cutout

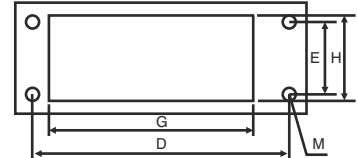

Cat. No. For Housing with 2 Levers	Cat. No. For Housing with 4 Pegs	Enclosure Type	Enclosure Size (mm)	D (mm)	E (mm)	G (mm)	H (mm)	M (Ømm)
W10HB2/B10	WR10HB2/B10	10B	57 x 27	83	32	66.5	36	4.5
W16HB2/B16	WR16HB2/B16	16B	77 x 27	103	32	86.5	36	4.5
W24HB2/B24	WR24HB2/B24	24B	104 x 27	130	32	113	36	4.5
W32HB2/A32	-	32A	66 x 40	92	42	75	58.6	4.5
W32HB2/B32	WR32HB2/B32	32B	77 x 62	110	65	87.5	76.5	5.5