



Technical Details :	
Chain Material	Glass fibre reinforced Polyamide, UL 94-HB
Noise	40 dB (DIN EN 61672-1)
Applications	Gantry Robot, Machine Center, Textile Machine, Welding Machine, Wood Work Machine and Fabric Machine
Speed	10m / sec
Temperature Range	-30°C to +130°C Continuous
Vertical Installation Lengths	Curve above = max. 6 m Curve below = max. 100 m Side mounted, Unsupported = max. 3 m


OPEN TYPE CABLE DRAG CHAINS

(CPS095N SERIES)



CPS095N


Bending Radius R	135	150	200	230	280	400
Lp	805	855	1010	1110	1260	1640
Lf	364	374	428	459	505	629
H	352	382	482	542	642	882
Technical Dimensions (mm)						

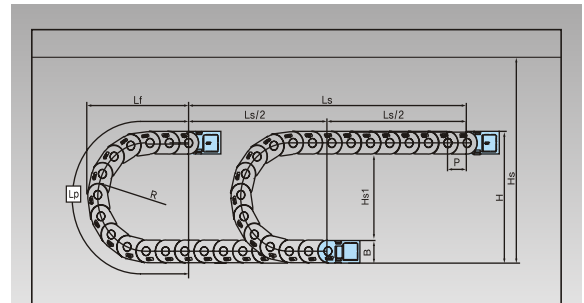

Ls : Stroke
Total Length L=LS / 2 + Lp
Safe space Hs = H + 50 mm

Chain Cross Section

Cat. No.	A	B	C	D	Bending Radius
CPS095N.075	115	82	75	54	
CPS095N.100	140	82	100	54	
CPS095N.125	165	82	125	54	
CPS095N.150	190	82	150	54	
CPS095N.175	215	82	175	54	135, 150, 200,
CPS095N.200	240	82	200	54	230, 280, 400
CPS095N.250	290	82	250	54	
CPS095N.300	340	82	300	54	
CPS095N.350	390	82	350	54	
CPS095N.400	440	82	400	54	

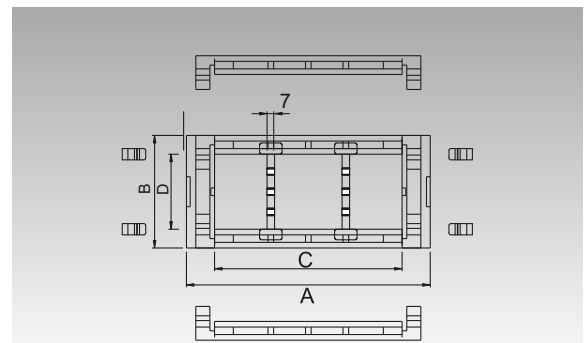

End Bracket (Polyamide)

Cat. No.	End Bracket Type	Suitable for Chain Size	Fixed Point	Moving Point
EBS095N	Normal (B1/B2/B3) In Steel	CPS095N		
EBN095.E	Easy (B0) In PA	CPS095N		