
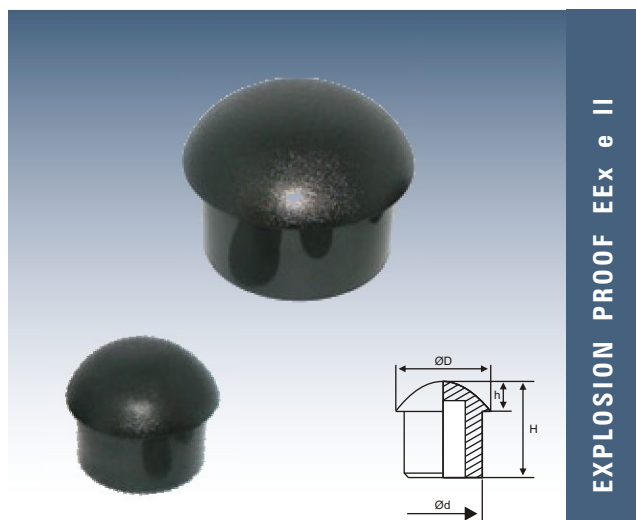

**PROTECTION TABS - STANDARD**


Protection Tabs made of Polyamide 6 are used in assembly work for instruments, machines etc., where only Cable Glands are mounted and cable connection is made later. This prevents dust and moisture from penetrating the enclosure or equipment.

Technical Details :	
Material	Polyamide 6
Colour	RAL 9005 (Black)
Temperature Range	-20°C to +80°C
Protection Class	IP 68
Application	For Pg, Metric and NPT threaded Cable Glands



For Cable Gland Size	Cat. No.	H (mm)	D (mm)Ø	h (mm)	d (mm)Ø	Standard Pack (pieces)
Pg 7 / M 12	BPM-2S	10.0	9.2	3.5	6.5	50
Pg 9 / M16 (Brass)	BPM-E1	16.0	10.5	5	8	50
Pg 11 / M 16 (Polyamide)	BPM-21	20.5	13.5	5.5	10.0	50
Pg 13.5 / M 20 x 1.5/2	BPM-22	18.0	16.0	8.0	12.0	50
Pg 16 / M 20 x 1.5/3	BPM-22L	18.5	18.0	8.5	13.5	50
Pg 21 / M 25	BPM-23	21.0	18.0	10.0	22.0	50
Pg 29 / M 32	BPM-24	25.0	28.5	10.0	25.0	50
Pg 36 / M 40	BPM-25	27.5	37.5	10.5	32.0	50
Pg 42 / M 50	BPM-26	33.0	44.5	13.0	38.0	30
Pg 48 / M 63	BPM-27	39.0	52.0	16.0	44.0	30


**EXPLOSION PROOF EEx e II**
**PROTECTION TABS**


Protection Tabs made of Polyamide 6 are used in assembly work for instruments, machines etc., where only Cable Glands are mounted and cable connection is made later. This prevents dust and moisture from penetrating the enclosure or equipment.

Technical Details :	
Material	Polyamide 6
Colour	RAL 9005 (Black)
Temperature Range	-20°C to +80°C
Protection Class	IP 68
Certificate No.	CESI 06 ATEX 034X
Execution	EEx e II

For Cable Gland Size	Cat. No.	H (mm)	D (mm)Ø	h (mm)	d (mm)Ø	Standard Pack (pieces)
Pg 7 / M 12	EBPM-2S	10	9.2	3	6.5	50
Pg 9 / M16 (Brass)	EBPM-E1	16	10.5	5	8	50
Pg 11 / M 16 (Polyamide)	EBPM-21	20.7	13.5	5.5	9.7	50
Pg 13.5 / M 20 x 1.5/2	EBPM-22	18	15.7	8.3	12	50
Pg 16 / M 20 x 1.5/3	EBPM-22L	18.3	18	9	13.6	50
Pg 21 / M 25	EBPM-23	21	22.2	10.1	17.8	50
Pg 29 / M 32	EBPM-24	24.5	28.8	10.2	25	50
Pg 36 / M 40	EBPM-25	27.7	37.5	11.2	31.8	50
Pg 42 / M 50	EBPM-26	33.3	44.5	11.6	38.2	30
Pg 48 / M 63	EBPM-27	39.2	51.7	16	44.2	30