


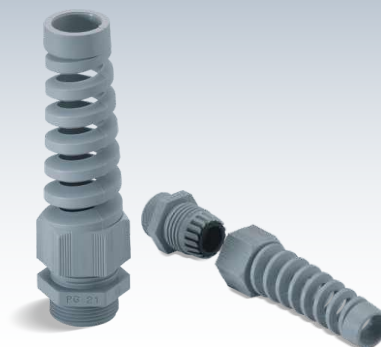




Spiral Cable Glands offer maximum protection against conductor fatigue caused by flexing cables. Designed for kink protection and mainly used for moving machine assemblies.

Technical Details :	
Material	Polyamide 6
Colour	RAL 7001 (Grey) RAL 9005 (Black)
Protection Class	IP 68, 5 bar
Sealing Ring	Neoprene
Temperature Range	-30°C to +80°C Continuous, +150°C Intermittent
Threads available	Pg, Metric. For NPT Threads contact Controlwell
Approvals	  

SPIRAL CABLE GLANDS



Pg Thread

Size	Cat. No. Grey	Cat. No. Black	Standard Pack (pieces)	Thread Diameter (mm)	Thread Length (mm)	Wrench (mm)	Clamping Range (mm)
Pg 7	BSSP-01	BSSP-21	100	13	8	15	3 - 6.5
Pg 9	BSSP-02	BSSP-22	50	16	8	19	4 - 8
Pg 11	BSSP-03	BSSP-23	50	19	8	22	5 - 10
Pg 13.5	BSSP-04	BSSP-24	50	21	9	24	6 - 12
Pg 16	BSSP-05	BSSP-25	50	23	10	27	10 - 14
Pg 21	BSSP-06	BSSP-26	25	29	11	33	13 - 18

Metric Thread

Size	Cat. No. Grey	Cat. No. Black	Standard Pack (pieces)	Thread Diameter (mm)	Thread Length (mm)	Wrench (mm)	Clamping Range (mm)
M 12 x 1.5	BMSP-0S	BMSP-2S	50	12	8	15	3 - 6.5
M 16 x 1.5	BMSP-01	BMSP-21	50	16	10	22	5 - 10
M 20 x 1.5	BMSP-02	BMSP-22	20	20	10	24	6 - 12
M 20 x 1.5	BMSP-03	BMSP-23	20	20	10	27	10 - 14
M 25 x 1.5	BMSP-05	BMSP-25	20	25	10	33	13 - 18