




Specially designed and moulded Membranes in these Junction Boxes, act as a Cable Glands offering IP 65 protection. After piercing the membrane with a sharp instrument, the cable / flexible conduit has to be inserted and slightly pulled out (withdrawn) to achieve a tight wrap around the cable / conduit resulting in positive clamping. Junction Boxes are also available with specially designed Nipples which act as Cable Glands offering IP 65 protection.

Technical Details :	
Material	ABS
Colour	Grey
Screw	Zinc Plated and Chromate
Gasket	Silicon Rubber EPDM
Lid	Grey Colour / Transparent
Standard	IEC 670, CEI 23-48
Protection Class	IP 65
Approvals	CE

JUNCTION BOXES (WITH NIPPLES)

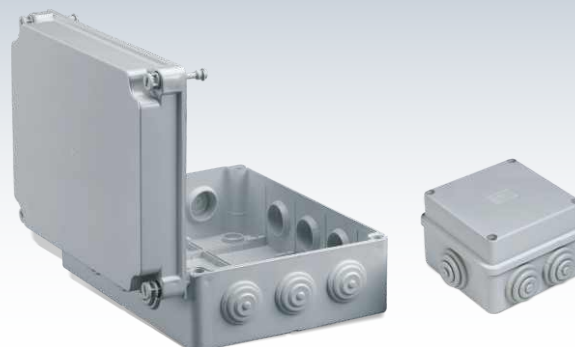

Junction Boxes with Nipples - Grey Screwed Lid

Cat. No.	Internal Dimension (mm) L x W x H	No. of Nipples
M003 *	80 x 80 x 40	6
M005	100 x 100 x 50	6
M006	100 x 100 x 65	6
M007	120 x 75 x 50	6
M008	150 x 110 x 70	10
M009	190 x 145 x 70	10
M010	240 x 190 x 90	12
M011	240 x 190 x 110	12
M012	310 x 230 x 115	12

* Press-on Lid with IP 44 protection

Junction Boxes with Nipples - Grey Hinged Lid

Cat. No.	Internal Dimension (mm) L x W x H	No. of Nipples
M009.A	190 x 140 x 70	10
M010.A	240 x 190 x 90	12
M012.A	305 x 225 x 125	12
M014.A	380 x 300 x 120	12
M015.A	460 x 380 x 120	14